

SKSDR360SS

36-INCH DUAL-FUEL PRO RANGE WITH STEAM-ASSIST OVEN AND SOUS VIDE



BUILT-IN SOUS VIDE

The industry's first built-in sous vide delivering the ultimate in precision cooking, right on the cooktop. Get professional-style results every time and capture the full, true flavor of foods.

POWER-UP OR SIMMER DOWN

Two Ultra-High™ Burners deliver 23K BTUs of pure cooking power for better searing and quick stir frying. Two Ultra-Low™ Burners simmer down to maintain temperatures as low as 100° to prepare delicate sauces and sugary confections.

LARGEST CAPACITY STEAM-ASSIST CONVECTION OVEN

Spacious 6.3 cu. ft. capacity oven combines steam and convection cooking for gourmet results. The convection system cooks food quickly and evenly while steam helps to preserve texture, appearance and taste.

SPEED-CLEAN™

Makes fast work of cleaning a lightly-soiled oven with just a ten minute cycle, using only water.

BUILT-IN WOK GRATE

The two front burner grates are convertible for round-bottom wok cooking. Stir fry at home with professional-style results.

Innovation

Wi-Fi-Enabled for SmartThinQ® Control with iPhone / Android App	Yes
Sous Vide Cooking	Yes

Cooktop Features

Number of Burners / Elements	4 + Sous Vide
Continuous Grates	2
Wok Convertible Grate (On Front Burners)	Yes
Heating Element "ON" Indicator Light	Yes
LED Power Level Display	Yes

Cooktop Performance

Simmer – Max. BTU/h (NG)	
Left Rear	310 – 15,000
Right Rear	310 – 15,000
Left Front	650 – 23,000
Right Front	650 – 23,000
Sous Vide Module	800W



SKSDR360SS

36-INCH DUAL-FUEL PRO RANGE WITH STEAM-ASSIST OVEN AND SOUS VIDE

SIGNATURE
KITCHEN SUITE

Oven Features & Performance

Oven Type	
Steam Assisted Convection Oven	
Oven Capacity (cu. ft.)	6.3
Special Cooking & Steam Maintenance Modes	
ProHeat™ Bake, ProHeat™ Convection Bake, ProHeat™ Convection Roast, Broil, RapidHeat Roast+, Gourmet Chef, Steam-Assist, Gourmet Steam, Warm, Proof, My Recipe	
Convection System	ProHeat™
Convection Element	2,500 W
Convection Conversion	Yes
Broil Element	4,200 W
Bake Element	2,500 W
Steam Element	720 W
Oven Racks	2 Gliding, 1 Heavy Duty
Oven Meat Probe	Yes
Self Cleaning	Yes
Variable Time Self Cleaning (3-4-5 hrs.)	Yes
Speed Cleaning	Yes
Automatic Shut-Off	Yes

Controls

Touch Oven Controls with LCD Display	Yes
Knob Cooktop Controls w/LED Display	Yes
Electronic Clock & Timer	Yes
Control Lock (Oven Functions Only)	Yes
Delay Start Time	Yes
Mood Light	Yes
Preheat Alarm Light	On / Off
Cooking Complete Reminder	Yes
Temperature Display (F or C)	Yes
Language Options	English, Spanish, French

Cooktop / General Features

Sealed Gas Burners (Brass)	Yes
Surface Material	Black Porcelain
Stainless Steel Side Panels	Yes
Door Lock	Yes

Technical Specs

Energy Source	Natural Gas and Electric
Alternative Energy Source	LP Gas and Electric
LP Conversion Kit Included	Yes
KW Rating at 240V	6.5 kW
Required Power Supply	240 / 208V, 60 Hz, 50 Amp

Dimensions and Weight

Overall Width (inches)	35 7/8
Overall Height Including Grates (inches)	36 11/16 to 38 1/8
Overall Depth Including Door (inches)	26 3/4
Overall Depth Including Handle (inches)	29 5/16
Size of Water Tank	1,000cc
Net Weight (approx.)	379 lbs.
Shipping Weight (approx.)	547 lbs.

Accessories

Included Accessories
Broiler Pan, Steam Pan, 2 Gliding Racks, Heavy Duty Rack, Meat Probe, Cleaning Pad, Sous Vide Bath, Sous Vide Rack

Warranty Summary*


Limited Warranty, Parts & Labor	2 Years
Additional 1 Year When Product Registration is Completed Online with Owner Opt-in for Wi-Fi Monitoring	Yes

*These warranties give you specific legal rights and you may have other rights that vary from state to state. For complete warranty details, refer to your Use & Care manual.

SKSDR360SS

36-INCH DUAL-FUEL PRO RANGE WITH STEAM-ASSIST OVEN AND SOUS VIDE

CUTOUT DIMENSIONS

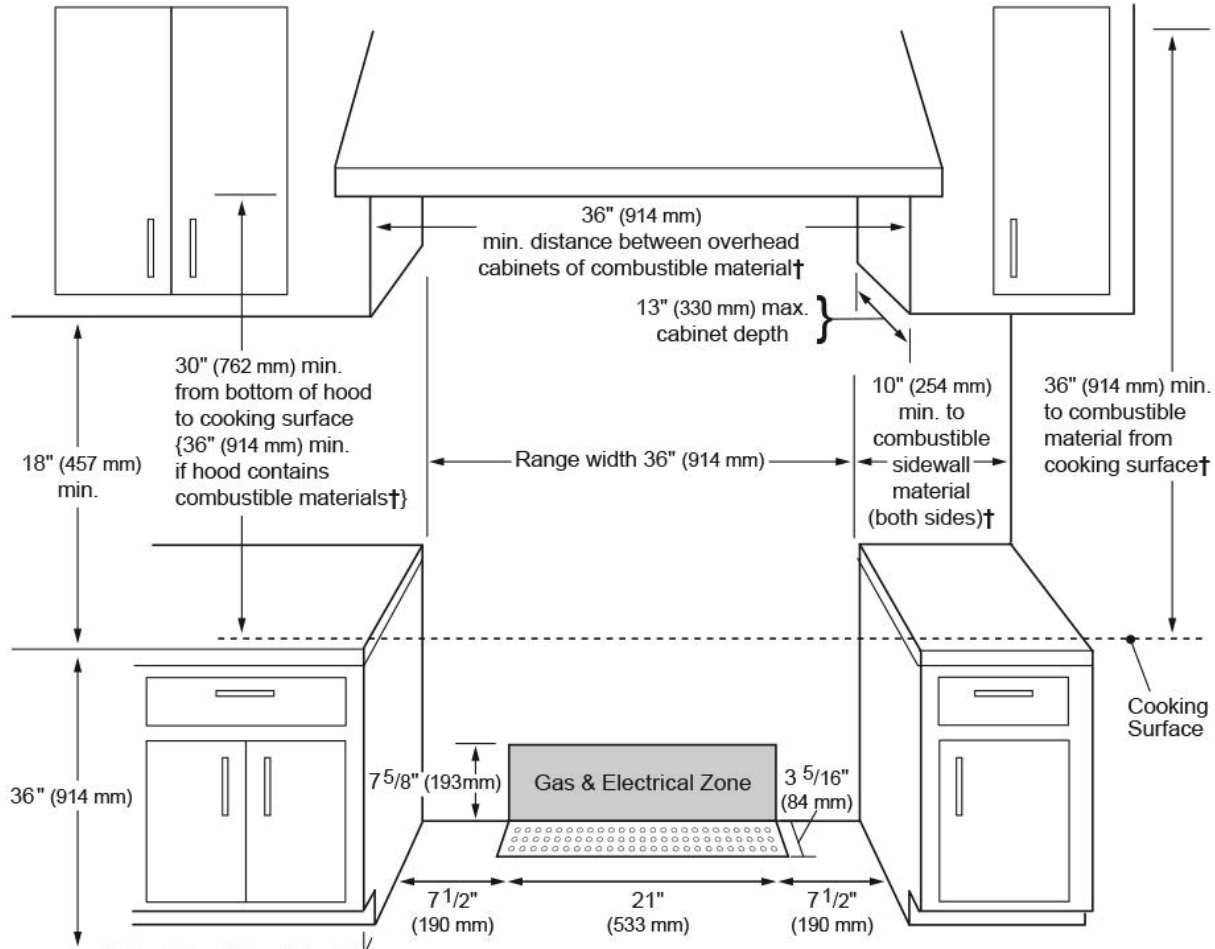

† as defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 12" (305 mm) must be approved by the local codes and/or by the local authority having jurisdiction.

Electrical and Gas Specifications

Dual-Fuel Ranges are designed to be connected to a 240 / 208V, 60Hz., 4-wire, single-phase power supply. An individual properly grounded 50 Amp circuit breaker is required. Electrical and gas hookups must be located on the rear wall/floor as shown.

Natural Gas or LP

Dual-Fuel Ranges are shipped by the factory to operate on natural gas. If the location / job site requires conversion from natural gas to propane (LP), utilize the included LP kit. Conversion must be done by a qualified installer or service technician.

SKSDR360SS

36-INCH DUAL-FUEL PRO RANGE WITH STEAM-ASSIST OVEN AND SOUS VIDE

SIGNATURE
KITCHEN SUITE

OVERALL PRODUCT DIMENSIONS

