SIGNATURE
KITCHEN SUITE

WALL OVEN
PLANNING / INSTALLATION GUIDE

WALL OVEN
PRODUCT DIMENSIONS

SINGLE WALL OVEN – SKSSV3001S

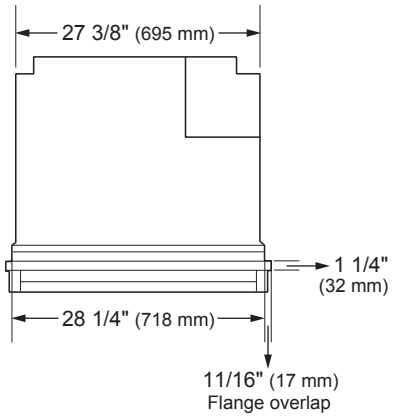



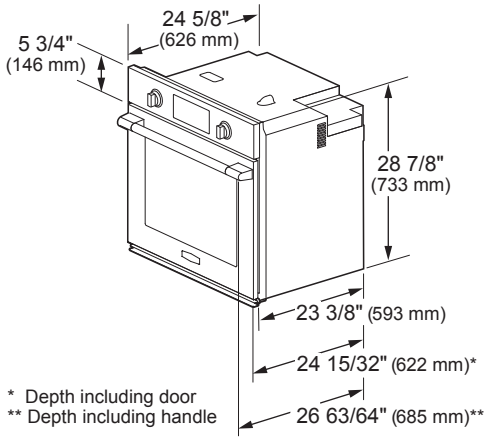

DOUBLE WALL OVEN – SKSDV3002S

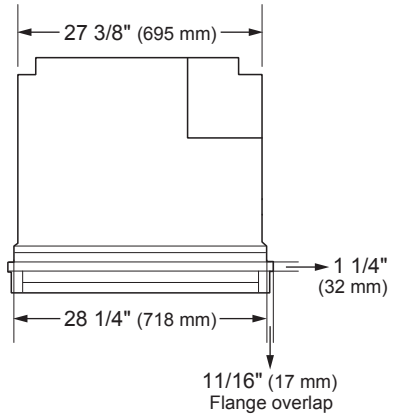

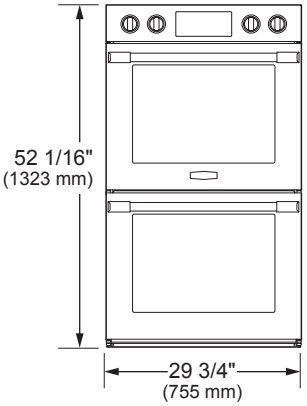

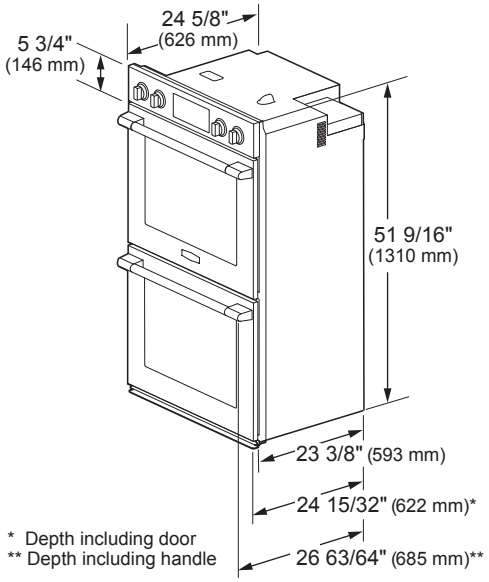

COMBINATION WALL OVEN – SKSCV3002S

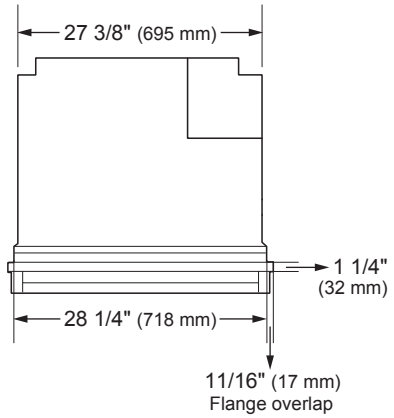

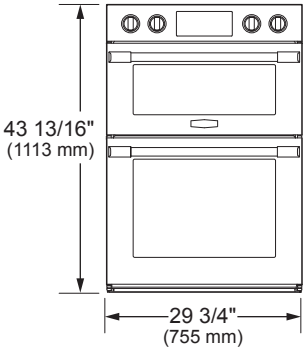

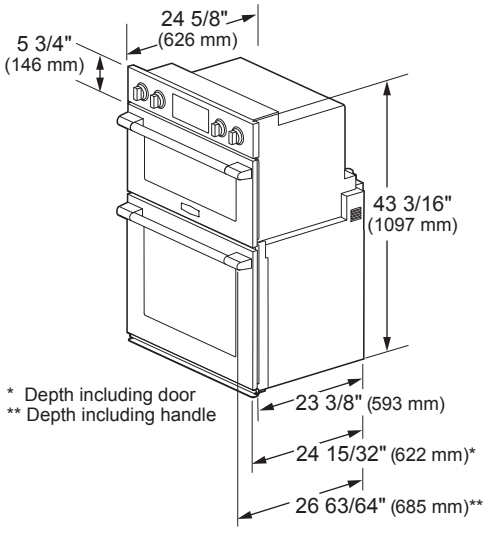

WALL OVEN
PROUD INSTALLATION

SINGLE WALL OVEN – SKSSV3001S

CUTOUT DIMENSIONS – PROUD INSTALLATION IN WALL CABINET

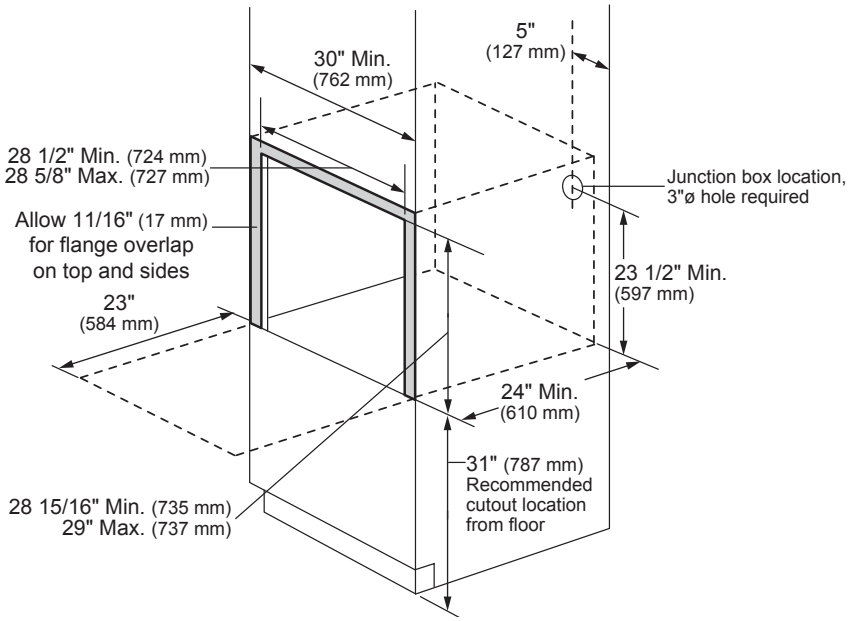

CUTOUT DIMENSIONS – UNDERCOUNTER INSTALLATION

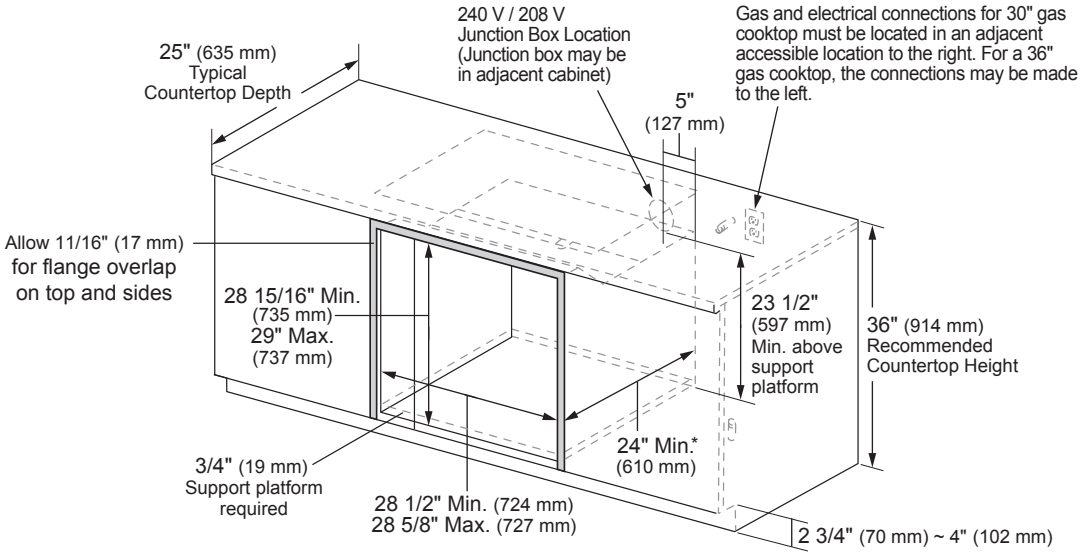

*25" Min. (635 mm) cutout depth required for undercounter flush installation.
Refer to installation art for flush installation in wall cabinet for required cutout dimensions.

WALL OVEN
PROUD INSTALLATION

SINGLE WALL OVEN – SKSSV3001S

MICROWAVE & TRIM KIT – SKSMC2401S / MK2030NST

CUTOUT DIMENSIONS – PROUD INSTALLATION IN WALL CABINET

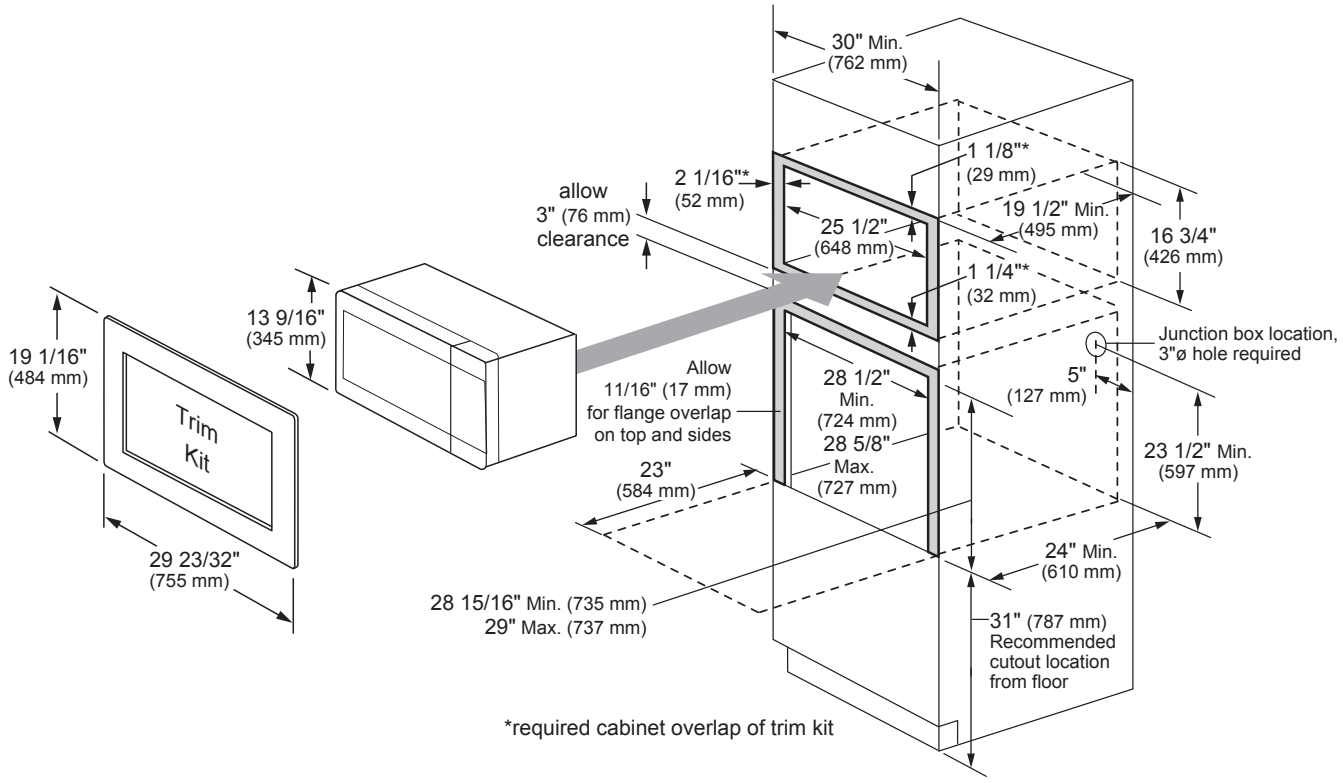

Notes

For installation above a built-in oven, the microwave oven should be installed on a 3/8" plywood base and supported by 2x4 or 1x2 equivalent runners on all sides. Base must support a minimum of 100 lbs.

A 120V, 60Hz grounded power receptacle should be installed at the back of the cabinet opening.

Warning

The trim kit uses air flow from the top, bottom and sides of the trim frame. Blocking the air flow can cause the microwave to function improperly and may cause damage to the microwave.

Allow an additional 1" of clearance beyond the trim kit on all sides to provide proper air flow.

WALL OVEN
PROUD INSTALLATION

DOUBLE WALL OVEN – SKSDV3002S

CUTOUT DIMENSIONS – PROUD INSTALLATION IN WALL CABINET

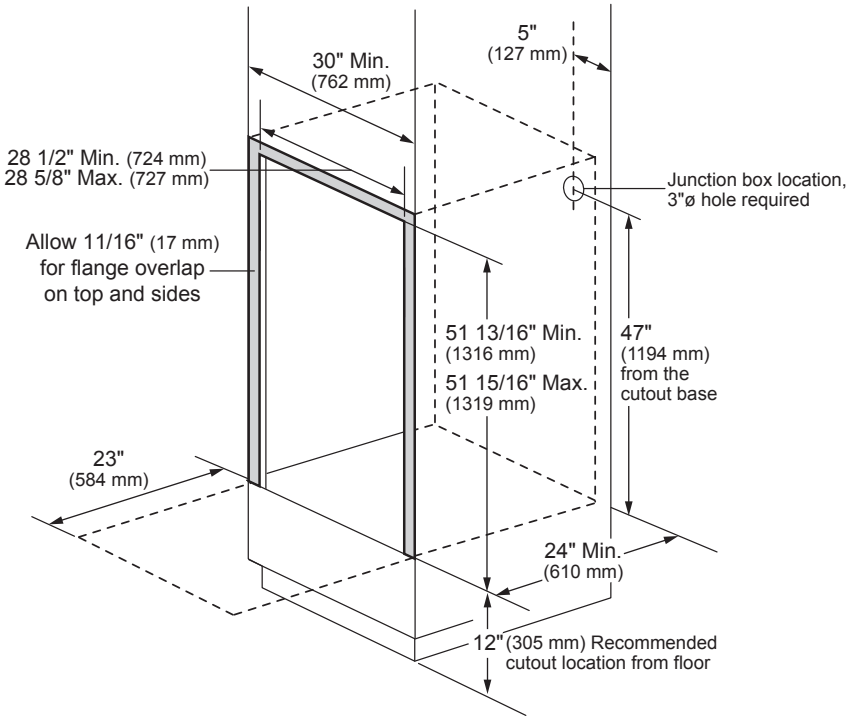

WALL OVEN
PROUD INSTALLATION

COMBINATION WALL OVEN - SKSCV3002S

CUTOUT DIMENSIONS – PROUD INSTALLATION IN WALL CABINET

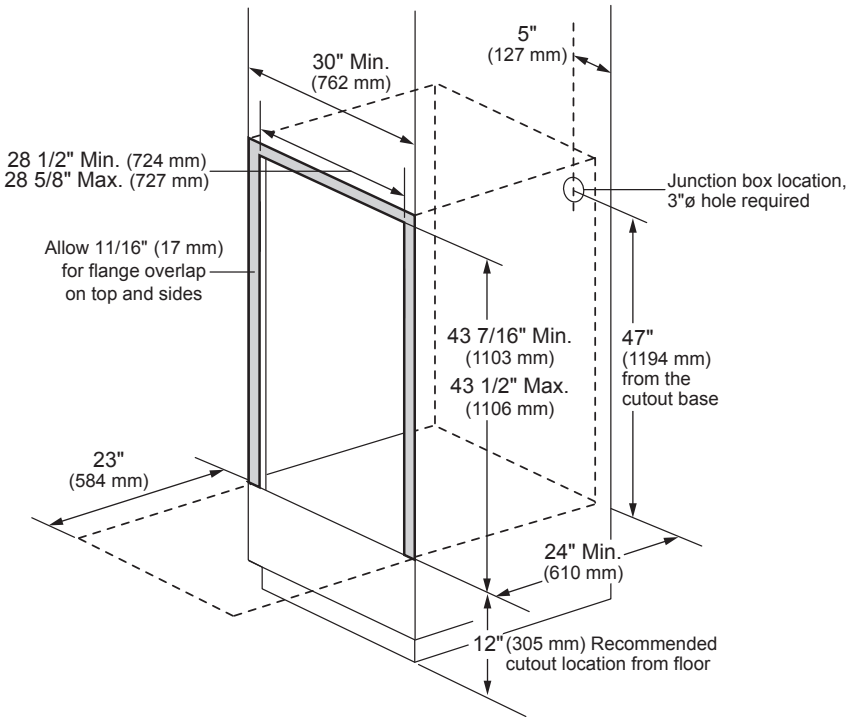

WALL OVEN
FLUSH INSTALLATION

SINGLE WALL OVEN – SKSSV3001S

CUTOUT DIMENSIONS – FLUSH INSTALLATION IN WALL CABINET

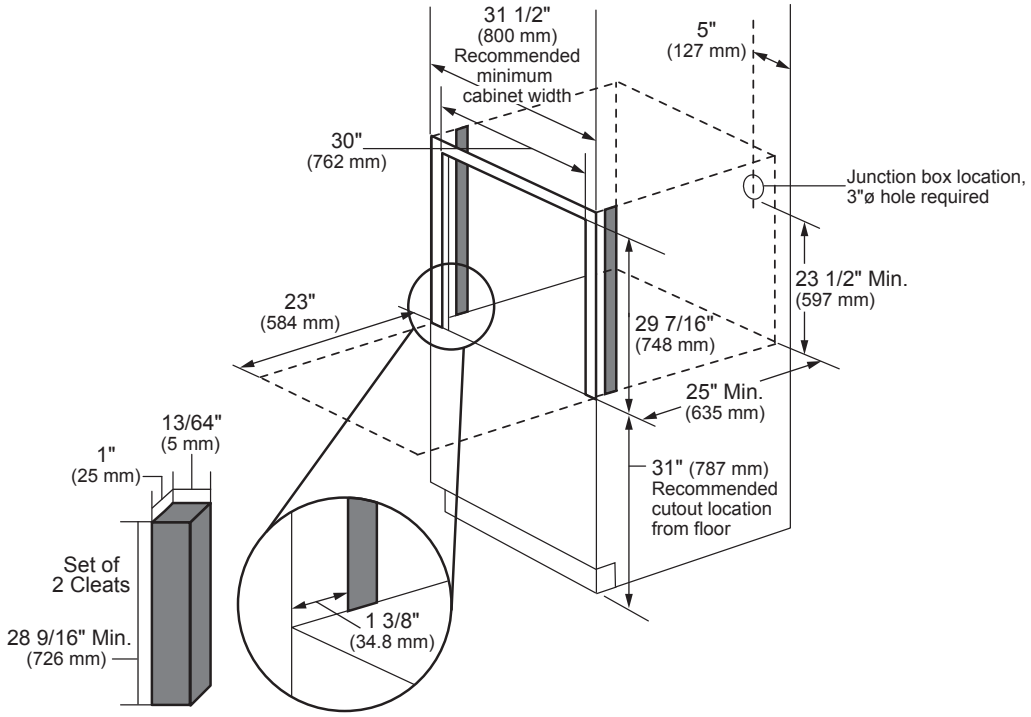

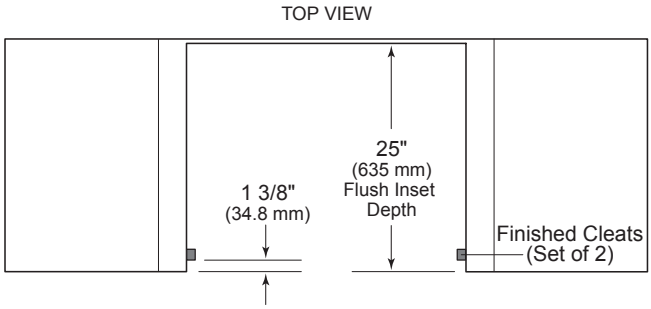

Notes

Cleats (spacers) must be recessed 1 3/8" (34.8 mm) from the front of the cabinet.

WALL OVEN
FLUSH INSTALLATION

DOUBLE WALL OVEN – SKSDV3002S

CUTOUT DIMENSIONS – FLUSH INSTALLATION IN WALL CABINET

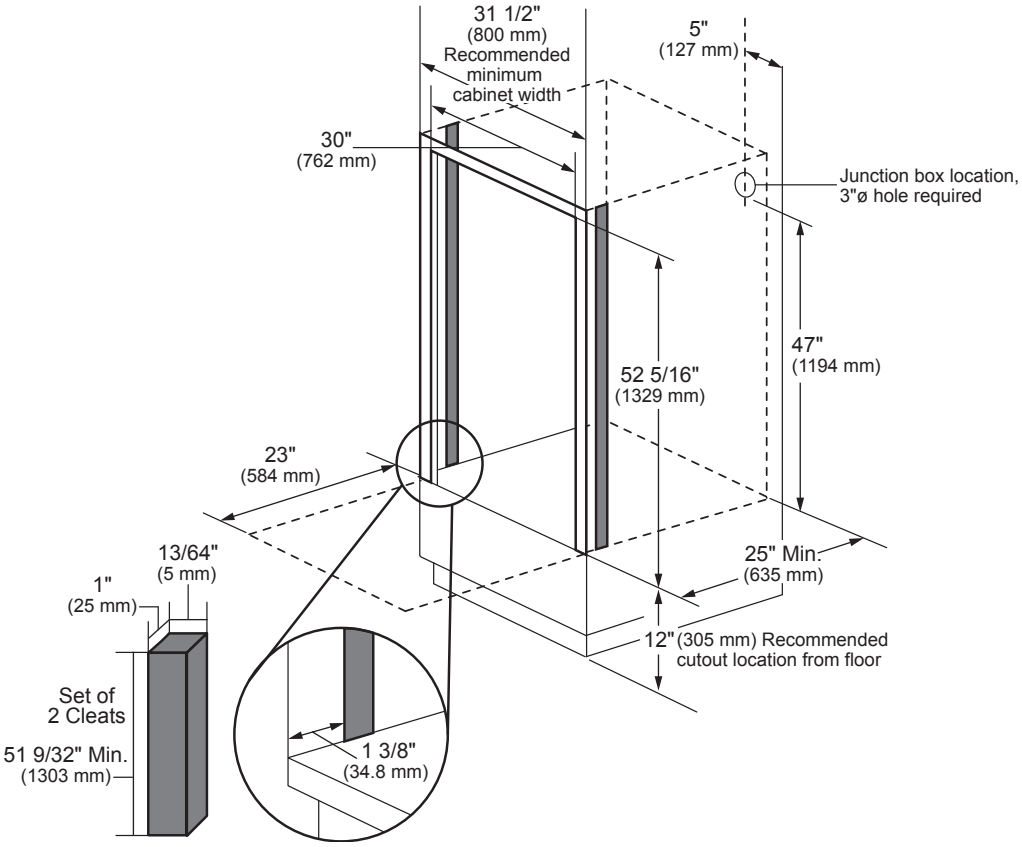

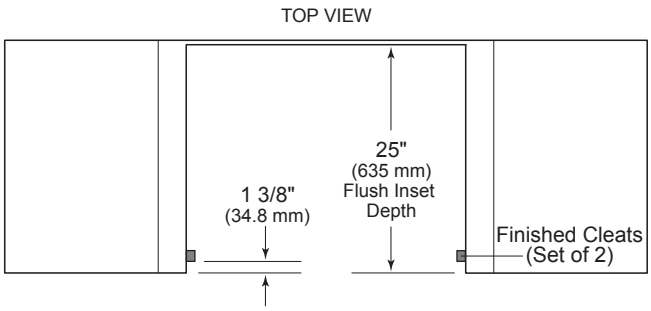

Notes

Cleats (spacers) must be recessed 1 3/8" (34.8 mm) from the front of the cabinet.

WALL OVEN
FLUSH INSTALLATION

COMBINATION WALL OVEN – SKSCV3002S

CUTOUT DIMENSIONS – FLUSH INSTALLATION IN WALL CABINET

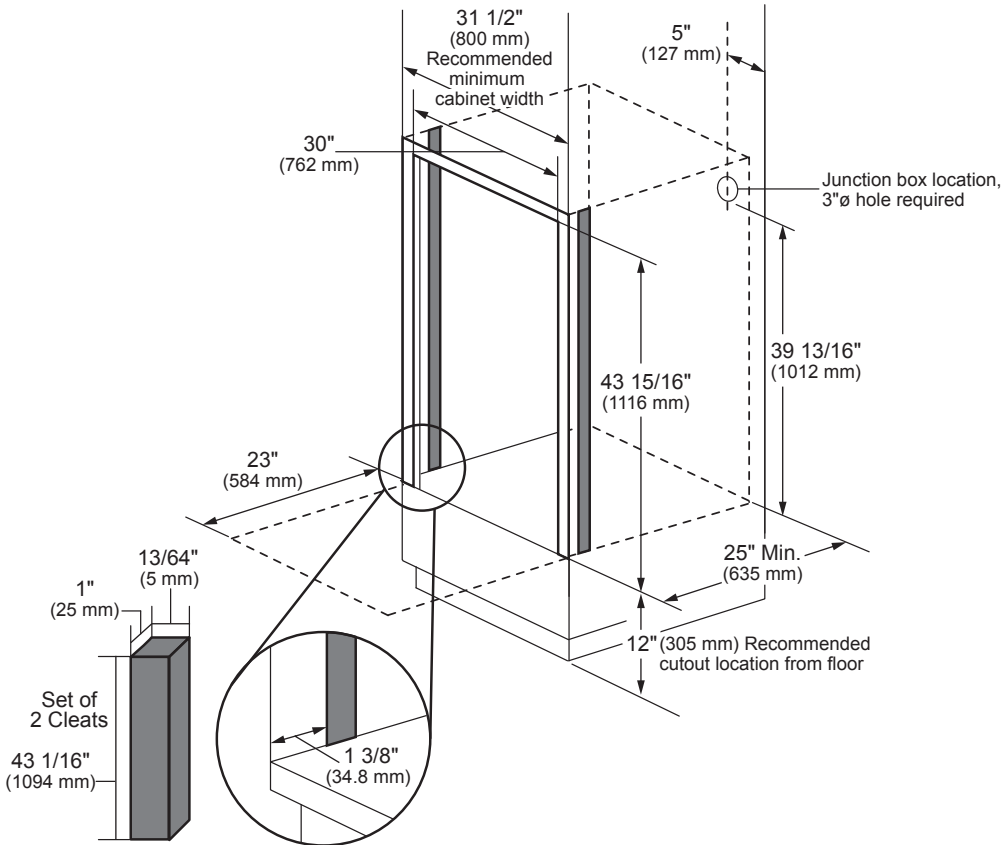

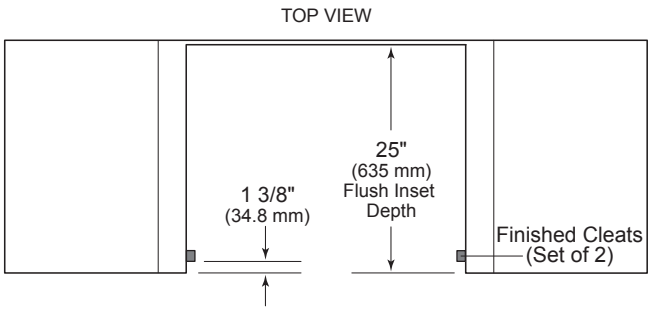

Notes

Cleats (spacers) must be recessed 1 3/8" (34.8 mm) from the front of the cabinet.

© 2020 Signature Kitchen Suite. All rights reserved. Design, features and specifications are subject to change without notice. Specifications are for planning purposes only. Consult the product's installation instructions for final dimensional data and other details prior to making cutouts or custom panels. Consult with a heating and ventilation engineer for your specific ventilation requirements. Non-metric weights and measurements are approximate. Smart features require Internet access.
1-855-790-6655 | www.signaturekitchensuite.com