






# SKSDR480GS

## 48-INCH DUAL-FUEL PRO RANGE WITH 6 BURNERS AND GRIDDLE

### CUTOUT DIMENSIONS

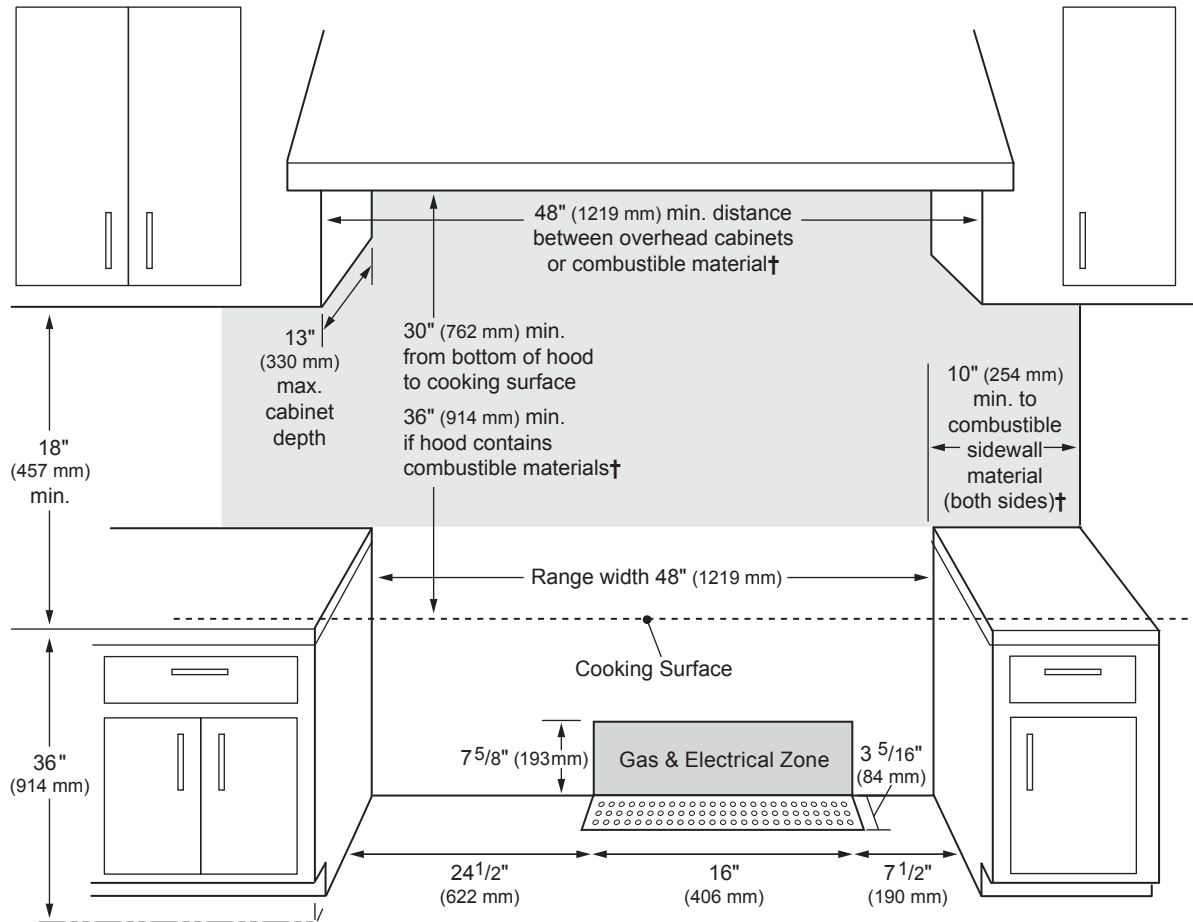

†as defined in the “National Fuel Gas Code” (ANSI Z223.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 12” (305 mm) must be approved by the local codes and/or by the local authority having jurisdiction.

### Electrical and Gas Specifications

Dual-Fuel Ranges are designed to be connected to a 240 / 208V, 60Hz., 4-wire, single-phase power supply. An individual properly grounded 50 Amp circuit breaker is required. Electrical and gas hookups must be located on the rear wall/floor as shown.

### Natural Gas or LP

Dual-Fuel Ranges are shipped by the factory to operate on natural gas. If the location / job site requires conversion from natural gas to propane (LP), utilize the included LP kit. Conversion must be done by a qualified installer or service technician.

**SKSDR480GS**  
**48-INCH DUAL-FUEL PRO RANGE WITH**  
**6 BURNERS AND GRIDDLE**

**SIGNATURE**  
KITCHEN SUITE

**OVERALL PRODUCT DIMENSIONS**

