SKSRT360GS 36-INCH GAS PRO RANGETOP WITH 4 BURNERS AND GRIDDLE



Image not final

CHROMIUM GRIDDLE

The chromium griddle delivers consistent, even heating across the entire surface for professional results and the durable, polished finish resists scratches.

POWER-UP OR SIMMER DOWN

Two Ultra-High Burners deliver 23K BTUs of pure cooking power for great searing and quick stir frying. Two Ultra-Low Burners simmer down to maintain temperatures as low as 100° to prepare delicate sauces and sugary confections.

BUILT-IN WOK GRATE

The two front burner grates are convertible for roundbottom wok cooking. Stir fry at home with professionalstyle results.

SMART KNOBS[™]

Each burner has a dedicated Smart Knob[™] featuring a large, illuminated display that makes it easy to read from across the room. Smart Knobs[™] include a Wi-Fi function that let you see if the burner is on or off using the ThinQ[®] app.

Innovation

Wi-Fi-Enabled for ThinQ° Control with iPhone / Android App	Yes
Remote Operations	No
Remote Monitoring	Yes

SIGNATURE

Cooktop Features

Number of Burners	4 + Griddle
Continuous Grates	2
Wok Convertible Grate (On Front Burners)	Yes
Chromium Griddle Plate	1
Heating Element "ON" Indicator Light	Yes
LED Power Level Display	Yes

Cooktop Performance

Simmer – Max. BTU/h (NG)	
Left Rear	310 - 15,000
Right Rear	310 - 15,000
Left Front	650 - 23,000
Right Front	650 - 23,000
Griddle BTU/h (NG)	18,000

SKSRT360GS 36-INCH GAS PRO RANGETOP WITH 4 BURNERS AND GRIDDLE

SIGNATURE

3 Years

Со	ntro	ls

Cooktop / General Features

Sealed Gas Burners (Brass)	Yes
Surface Material	Black Porcelain
Stainless Steel Side Panels	Yes

Technical Specs

Energy Source	Natural Gas	
Alternative Energy Source	LP Gas	
LP Conversion Kit Included	Yes	
Amp Rating at 120V	5.0 Amp	
Required Power Supply	Supply 120VAC, 60 Hz, 15 Amp	

Warranty Summary*

Limited Warranty, Parts & Labor

Natural Gas or LP

Gas Rangetops are shipped by the factory to operate on natural gas. If the location / job site requires conversion from natural gas to propane (LP), utilize the included LP kit. Conversion must be done by a qualified installer or service technician.


Dimensions and Weight

Overall Width (inches)	35 7/8"
Overall Height Including Grates (inches)	8 15/16"
Overall Depth Including Knobs (inches)	28 15/16"
Overall Depth without Knobs (inches)	26 3/4"
Net Weight (approx.)	172 lbs.
Shipping Weight (approx.)	239 lbs.

SKSRT360GS 36-INCH GAS PRO RANGETOP WITH 4 BURNERS AND GRIDDLE

SIGNATURE

CUTOUT DIMENSIONS

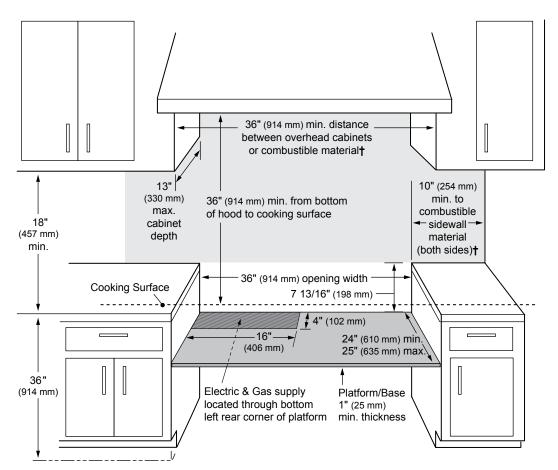

[†]As defined in the "National Fuel Gas Code" (ANSI Z223.1, Current Edition). Clearances from non-combustiblematerials are not part of the ANSI Z21.1 scope and are not certified by CSA. Clearances of less than 12" (305 mm) must be approved by the local codes and/or by the local authority having jurisdiction.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area. For island installation, 12" (305 mm) minimum clearance from back of rangetop.

Important Installation Information: Rangetops use a single phase, four-wire cable, 120/240 volt, 60 hertz, AC-only electrical supply with ground.

OVERALL PRODUCT DIMENSIONS

